




S5700-SI Series Standard Gigabit Switches

Huawei S5700-SI series switches are standard Layer 2/Layer 3 Gigabit Ethernet switches that provide flexible GE access ports and 10GE uplink ports.

Product Overview

Building on the next-generation high-performance hardware and Huawei's Versatile Routing Platform (VRP), the S5700-SI supports intelligent stack (iStack), diversified security control, and mature IPv6 features, allows for flexible Ethernet networking, and is easy to operate and maintain. With all these merits, the S5700-SI is widely used for access/aggregation in enterprise campus networks or access in data center networks.

Models and Appearances

Models and Appearances	Description
 <p>S5700-24TP-SI-AC</p>	<ul style="list-style-type: none"> • 24 Ethernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP ports • AC model • Forwarding performance: 36 Mpps • Switching capacity: 256Gbps
 <p>S5700-26X-SI-12S-AC</p>	<ul style="list-style-type: none"> • 12 Ethernet 10/100/1000 ports, 12 100/1000Base-X ports, 2 10GE SFP+ ports • AC power supply, supporting Redundant Power Supply (RPS) • Forwarding performance: 66Mpps • Switching capacity: 256Gbps
 <p>S5700-48TP-SI-AC</p>	<ul style="list-style-type: none"> • 48 Ethernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP ports • Two models: AC model and DC model • Forwarding performance: 72 Mpps • Switching capacity: 256Gbps

Features and Highlights

Powerful Support for Services

- The S5700-SI supports IGMP v1/v2/v3 snooping, IGMP filter, IGMP fast leave, and IGMP proxy. The S5700-SI supports wire-speed replication of multicast packets between VLANs, multicast load balancing among member interfaces of a trunk, and controllable multicast, meeting requirements for IPTV and other multicast services.

Comprehensive Reliability Mechanisms

- Besides STP, RSTP, and MSTP, the S5700-SI supports enhanced Ethernet reliability technologies such as Smart Link and RRPP (Rapid Ring Protection Protocol), which implement millisecond-level protection switchover and ensure network reliability. It also provides Smart Link multi-instance and RRPP multi-instance to implement load balancing among links, optimizing bandwidth usage.
- The S5700-SI supports the Smart Ethernet Protection (SEP) protocol, a ring network protocol applied to the link layer on an Ethernet network. SEP can be used on open ring networks and can be deployed on upper-layer aggregation devices to provide fast switchover (within 50 ms), ensuring non-stop transmission of services. SEP features simplicity, high reliability, fast switchover, easy maintenance, and flexible topology, facilitating network planning and management.
- The S5700-SI supports Ethernet Ring Protection Switching (ERPS), also referred to as G.8032. As the latest ring network protocol, ERPS was developed based on traditional Ethernet MAC and bridging functions and uses mature Ethernet OAM function and a Ring Automatic Protection Switching (R-APS) mechanism to implement millisecond-level protection switching. ERPS supports various services and allows flexible networking, helping customers build a network with lower OPEX and CAPEX.

Well-designed QoS Policies and Security Mechanisms

- The S5700-SI implements complex traffic classification based on packet information such as the 5-tuple, IP precedence, ToS, DSCP, IP protocol type, ICMP type, TCP/UDP port number, VLAN ID, Ethernet protocol type. ACLs can be applied to inbound or outbound direction on an interface. The S5700-SI supports a flow-based two-rate three-color CAR. Each port supports eight priority queues and multiple queue scheduling algorithms such as WRR, DRR, SP, WRR+SP, and DRR+SP. All of these ensure the quality of voice, video, and data services.
- The S5700-SI supports 802.1x authentication, MAC address authentication, and combined authentication on a per port basis, as well as Portal authentication on a per VLANIF interface basis.
- The S5700-SI provides multiple security measures to defend against Denial of Service (DoS) attacks, and attacks against networks or users. DoS attack types include SYN Flood attacks, Land attacks, Smurf attacks, and ICMP Flood attacks. Attacks to networks refer to STP BPDU/root attacks. Attacks to users include bogus DHCP server attacks, man-in-the-middle attacks, IP/MAC spoofing attacks, DHCP request flood attacks. DoS attacks that change the CHADDR field in DHCP packets are also attacks against users.
- The S5700-SI supports DHCP snooping, which discards invalid packets that do not match any binding entries, such as ARP spoofing packets and IP spoofing packets. This prevents man-in-the-middle attacks to campus networks that hackers initiate by using ARP packets. The interface connected to a DHCP server can be configured as a trusted interface to protect the system against bogus DHCP server attacks.
- The S5700-SI supports strict ARP learning, which prevents ARP spoofing attacks that will exhaust ARP entries. It also provides IP source check to prevent DoS attacks caused by MAC address spoofing, IP address spoofing, and MAC/IP spoofing.
- The S5700-SI supports centralized MAC address authentication, 802.1x authentication, and NAC. It authenticates users based on statically or dynamically bound user information such as the user name, IP address, MAC address, VLAN ID, access interface, and flag indicating whether antivirus software is installed. VLANs, QoS policies, and ACLs can be applied to users dynamically.
- The S5700-SI can limit the number of MAC addresses learned on an interface to prevent attackers from exhausting MAC address entries by using bogus source MAC addresses. This function minimizes packet flooding that occurs when MAC addresses of users cannot be found in the MAC address table.

Easy Deployment and Maintenance Free

- The S5700-SI supports automatic configuration, plug-and-play, deployment using a USB flash drive, and batch remote upgrade. These capabilities simplify device management and maintenance and reduce maintenance costs. The S5700-SI supports SNMP v1/v2c/v3 and provides flexible methods for managing devices. Users can manage the S5700-SI using the CLI and Web NMS. The NQA function helps users with network planning and upgrading. In addition, the S5700-SI supports NTP, SSH v2, HWTACACS, RMON, log hosts, and port-based traffic statistics.
- EasyDeploy: The Commander collects information about the topology of the client connecting to the Commander and saves client startup information based on the topology. The client can be replaced without configuration. Configuration and scripts can be delivered to the client in batches. In addition, the configuration delivery result can be queried. The Commander can collect and display power consumption on the entire network.
- The S5700-SI supports GARP VLAN Registration Protocol (GVRP), which dynamically distributes, registers, and propagates VLAN attributes to reduce manual configuration workloads of network administrators and to ensure correct VLAN configuration. In a complex network topology, GVRP simplifies VLAN configuration and reduces network communication faults caused by incorrect VLAN configuration.

- The S5700-SI supports MUX VLAN. MUX VLAN isolates Layer 2 traffic between interfaces in a VLAN. Interfaces in a subordinate separate VLAN can communicate with ports in the principal VLAN but cannot communicate with each other. MUX VLAN is usually used on an enterprise intranet to isolate user interfaces from each other but allow them to communicate with server interfaces. This function prevents communication between network devices connected to certain interfaces or interface groups but allows the devices to communicate with the default gateway.

PoE Function

- The S5700-SI PWR can use PoE power supplies with different power levels to provide -48V DC power for Powered Devices (PDs) such as IP phones, WLAN APs, and Bluetooth APs. In its role as Power Sourcing Equipment (PSE), the S5700-SI PWR complies with IEEE 802.3af and 802.3at (PoE+) and can work with PDs that are incompatible with 802.3af or 802.3at. Each port provides a maximum of 30 W power, complying with IEEE 802.3at. The PoE+ function increases the maximum power of each port and implements intelligent power management for high-power consumption applications. This facilitates the use of PDs. PoE ports can work in power-saving mode. The S5700-SI PWR provides improved PoE solutions. Users can configure whether and when a PoE port supplies power.

High Scalability

- The S5700-SI supports intelligent stacking (iStack). Multiple S5700-SI can be connected with stack cables to set up a stack, which functions as a virtual switch. A stack consists of a master switch, a backup switch, and several slave switches. The backup switch takes over services when the master switch fails, reducing service interruption time. Stacks support intelligent upgrade so that users do not need to change the software version of a switch when adding it to a stack.
- The iStack function allows users to connect multiple switches with stack cables to expand system capacity. These switches can be managed using a single IP address, which greatly reduces the costs of system expansion, operation, and maintenance. Compared with traditional networking technologies, iStack has advantages in scalability, reliability, and system architecture.

Various IPv6 Features

- The S5700-SI supports IPv4/IPv6 dual stack and can migrate from an IPv4 network to an IPv6 network. S5700-SI hardware supports IPv4/IPv6 dual stack, IPv6 over IPv4 tunnels (including manual tunnels, 6to4 tunnels, and ISATAP tunnels), and Layer 3 line-speed forwarding. The S5700 can be deployed on IPv4 networks, IPv6 networks, or networks that run both IPv4 and IPv6. This makes networking flexible and enables easy migration from IPv4 to IPv6.

Product Specifications

Item	S5700-24TP-SI	S5700-26X-SI-12S-AC	S5700-48TP-SI-AC
Fixed port	24 10/100/1000Base-T ports, 4 of which are dual-purpose 10/100/1000 or SFP	12 10/100/1000Base-T, 12 100/1000Base-X, 2 10GE SFP+	48 10/100/1000Base-T ports, 4 of which are dual-purpose 10/100/1000 or SFP
Extended slot	One extended slot for a stack card	NA	One extended slot for a stack card
MAC address table	IEEE 802.1d compliance 16 K MAC address entries MAC address learning and aging Static, dynamic, and blackhole MAC address entries Packet filtering based on source MAC addresses		
VLAN	4K VLANs Guest VLAN and voice VLAN GVRP MUX VLAN VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and ports 1:1 and N:1 VLAN Mapping		
Reliability	RRPP ring topology and RRPP multi-instance		


Item	S5700-24TP-SI	S5700-26X-SI-12S-AC	S5700-48TP-SI-AC
	Smart Link tree topology and Smart Link multi-instance, providing the millisecond-level protection switchover SEP ERPS(G.8032) STP(IEEE 802.1d), RSTP(IEEE 802.1w), and MSTP(IEEE 802.1s) BPDU protection, root protection, and loop protection		
IP routing	Static route, RIPv1, RIPv2, RIPng, ECMP		
IPv6 features	Neighbor Discovery (ND) Path MTU (PMTU) IPv6 ping, IPv6 tracer, and IPv6 Telnet 6to4 tunnel, ISATAP tunnel, and manually configured tunnel		
Multicast	IGMP v1/v2/v3 snooping and IGMP fast leave MLD v1/v2 snooping Multicast forwarding in a VLAN and multicast replication between VLANs Multicast load balancing among member ports of a trunk Controllable multicast Port-based multicast traffic statistics		
QoS/ACL	Rate limiting on packets sent and received by an interface Packet redirection Port-based traffic policing and two-rate three-color CAR Eight queues on each port WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms Re-marking of the 802.1p priority and DSCP priority Packet filtering at Layer 2 to Layer 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP port number, protocol type, and VLAN ID Rate limiting in each queue and traffic shaping on ports		
Security	User privilege management and password protection DoS attack defense, ARP attack defense, and ICMP attack defense Binding of the IP address, MAC address, interface, and VLAN Port isolation, port security, and sticky MAC Blackhole MAC address entries Limit on the number of learned MAC addresses 802.1x authentication and limit on the number of users on an interface AAA authentication, RADIUS authentication, HWTACACS authentication, and NAC SSH v2.0 Hypertext Transfer Protocol Secure (HTTPS) CPU defense Blacklist and whitelist 802.1x authentication, MAC address authentication, and combined authentication on a per port basis Portal authentication on a per VLANIF interface basis		
Management and	Stacking (not supported by S5700-26X-SI-12S-AC)		

Item	S5700-24TP-SI	S5700-26X-SI-12S-AC	S5700-48TP-SI-AC
maintenance	MAC Forced Forwarding (MFF) Virtual cable test SNMP v1/v2c/v3 RMON Web-based NMS System logs and alarms of different levels		
Interoperability	Supports VBST (Compatible with PVST/PVST+/RPVST) Supports LNP (Similar to DTP) Supports VCMP (Similar to VTP)		
Operating environment	<ul style="list-style-type: none"> Operating temperature: 0°C–50°C Relative humidity: 5%–95% (non-condensing) 	<ul style="list-style-type: none"> Operating temperature: 0°C–50°C Relative humidity: 5%–95% (non-condensing) 	<ul style="list-style-type: none"> Operating temperature: 0°C–50°C Relative humidity: 5%–95% (non-condensing)
Input voltage	AC: <ul style="list-style-type: none"> Rated voltage range: 100 V to 240 V AC, 50/60 Hz Maximum voltage range: 90 V to 264 V AC, 47 to 63 Hz 	AC: <ul style="list-style-type: none"> Rated voltage range: 100 V to 240 V AC, 50/60 Hz Maximum voltage range: 90 V to 264 V AC, 47 to 63 Hz 	AC: <ul style="list-style-type: none"> Rated voltage range: 100 V to 240 V AC, 50/60 Hz Maximum voltage range: 90 V to 264 V AC, 47 to 63 Hz
Dimensions (W x D x H)	442 x 220 x 43.6 mm	442 x 310 x 43.6 mm	442 x 420 x 43.6 mm
Power consumption	< 40 W	<42.3 W	< 64 W

Networking and Applications

On Large-sized Enterprise Networks

The S5700-SI can function as an access device on a large-sized or medium-sized enterprise network or an aggregation device on a small-sized campus network. It supports link aggregation and dual-homing to improve network reliability.

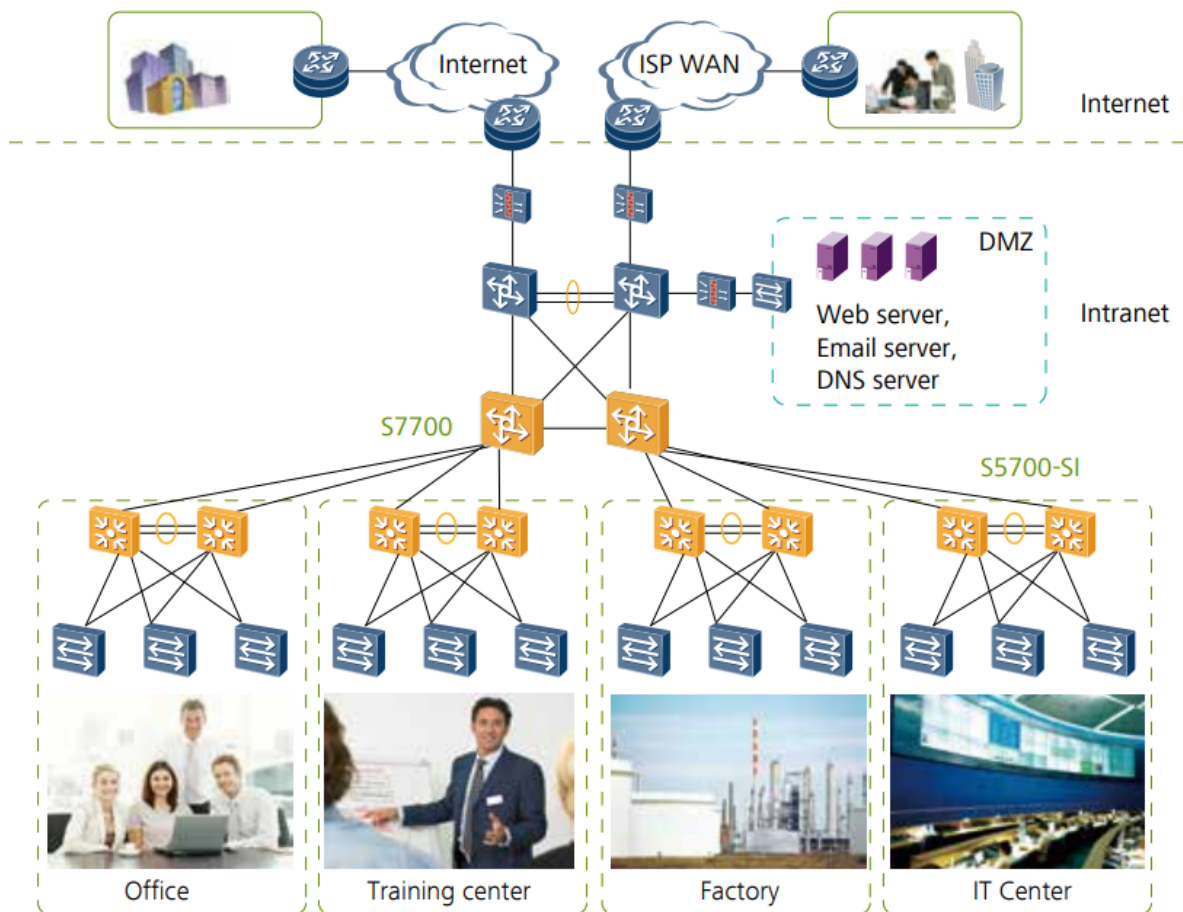

Ordering Information

Part Number	Description
02352360	S5700-24TP-SI-AC (24x Ethernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP, AC 110/220V)
02352353	S5700-48TP-SI-AC (48xEthernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP, AC110/220V)
02354039	S5700-26X-SI-12S-AC (12x Ethernet 10/100/1000 ports, 12x Gig SFP, 2x10 Gig SFP+, AC 110/220V)
02310JFA	150W AC Power Module
02310JFD	150W DC Power Module
02130879	500W AC PoE Power Module
02353857	RPS1800 Redundant Power System

More Information


For more information about Huawei Campus Switches, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2018. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website: e.huawei.com