



Huawei

AP8030DN & AP8130DN

Access Points

Datasheet



Product Overview

Huawei AP8030DN and AP8130DN are latest-generation 802.11ac outdoor access points (APs) that support 3 x 3 MIMO and three spatial streams and offer high flexibility with IEEE 802.11a/b/g/n/ac compliance. Both APs are physically hardened and feature enhanced outdoor coverage performance. They offer services simultaneously on 2.4 GHz and 5 GHz radios to connect more users, support wireless bridging, and provide gigabit access for wireless users. The AP8030DN and AP8130DN provide comprehensive service support capabilities and feature high reliability, high security, simple network deployment, automatic Access Controller (AC) discovery and configuration, and real-time management and maintenance, which meet outdoor network requirements. They are recommended for use in coverage scenarios (for example, high-density stadiums, squares, pedestrian streets, and amusement parks) and bridging scenarios (for example, wireless harbors, data backhaul, video surveillance, and train-to-ground backhaul).



AP8030DN



AP8130DN

Feature Overview

- 802.11ac wave 1 standards compliance, delivering services simultaneously on 2.4G and 5G radios; 450 Mbit/s at 2.4 GHz; 1.3 Gbit/s at 5 GHz; and 1.75 Gbit/s for the device
- The AP8130DN can switch from the 2.4 GHz frequency band to the 5 GHz frequency band. When working at dual 5 GHz frequency bands simultaneously, the AP provides a system rate of 2.16 Gbit/s and can function as a relay AP to implement wireless bridging functions, which reduces costs and improves device installation efficiency.
- Built-in 5 kA surge protectors; no additional surge protection device required. This design simplifies installation and saves costs.
- Use a metal shell and heat dissipation design, adapt to a wide temperature range from -40° C to +65° C, provide 6 kA or 6 kV surge protection capability on an Ethernet interface, and IP67 protection level, meeting industry-level use requirements.
- Fat AP , Fit AP and Cloud working modes

Feature Description

- **Cloud-based management**

Huawei Cloud Managed Network (CMN) Solution consists of the cloud management platform and a full range of cloud managed network devices. The cloud management platform provides various functions including management of APs, tenants, applications, and licenses, network planning and optimization, device monitoring, network service configuration, and value-added services.

- **802.11ac GE access**

The APs support the 80-MHz bandwidth mode. Frequency bandwidth increase brings extended channels and more sub-carriers for data transmission, and a 2.16 times higher rate.

High Quadrature Amplitude Modulation (HQAM) at 256-QAM increases the 5 GHz radio rate to 1.3 Gbit/s. The throughput of 802.11ac APs is twice that of traditional APs.

- **5G-prior access(Band Steering)**

The AP8130DN can switch from the 2.4 GHz frequency band to the 5 GHz frequency band. When working at dual 5 GHz frequency bands simultaneously, the AP provides a system rate of 2.6 Gbit/s and a 20% higher concurrency rate. In addition, it can function as a relay AP to implement wireless bridging functions, which reduces costs by 50%.

- **High-level protection**

The APs have built-in 5 kA feeder surge protectors and require no external surge protective devices, which simplifies installation and lowers costs. They use a metal shell, waterproof connectors, and an overall heat dissipation design, and provide IP67 dustproof and waterproof protection to ensure stable and reliable operations.

- **High Density Boost technology**

Huawei uses the following technologies to address challenges in high-density scenarios, including access problems, data congestion, and poor roaming experience:

- **Interference suppression**

In high-density scenarios, APs are usually densely placed. Huawei uses small-angle antennas that are purpose-built for high-density scenarios to mitigate interference. These antennas have good radiation angle control and can regulate AP coverage radius to within the appropriate range. Additionally, Huawei's Clear Channel Assessment (CCA) optimization technology reduces the possibility of air port resources shared by multiple devices, allows higher user access, and improves the throughput.

- **Air port performance optimization**

In high-density scenarios where many users access the network, the increased number of low-rate STAs consumes more resources on the air port, reduces the AP capacity, and lowers user experience. Therefore, Huawei APs will check the signal strength of STAs during access and reject access from weak-signal STAs. At the same time, the APs monitor the rate of online STAs in real time and forcibly disconnect low-rate STAs so that the STAs can reassociate with APs that have stronger signals. Terminal access control technology can increase air port use efficiency and allow access from more users.

- **5G-prior access (Band steering)**

The APs support both 2.4G and 5G frequency bands. The 5G-prior access function enables an AP to steer STAs to the 5 GHz frequency band first, which reduces load and interference on the 2.4 GHz frequency band, improving user experience.

- **Load balancing between APs**

After the load balancing function is enabled, the AC distributes users evenly to APs based on user quantity and traffic volume.

Traffic load is therefore balanced among APs to ensure stable AP performance.

- **Smart roaming**

Smart roaming technology is based on the 802.11k and 802.11v technologies and allows STAs to connect to APs with stronger signals, improving user experience and the overall performance of the wireless network.

- **Agile Beam**

Agile antenna polarization beam automatic adaption.

- **Wired and wireless dual security guarantee**

To ensure data security, Huawei APs integrate wired and wireless security measures and provide comprehensive security protection.

- **Authentication and encryption for wireless access**

The APs support WEP, WPA/WPA2-PSK, WPA/WPA2-802.1x, and WAPI authentication/encryption modes to ensure security of the wireless network. The authentication mechanism is used to authenticate user identities so that only authorized users can access network resources. The encryption mechanism is used to encrypt data transmitted over wireless links to ensure that the data can only be received and parsed by expected users.

- **Analysis on non-Wi-Fi interference sources**

Huawei APs can analyze the spectrum of non-Wi-Fi interference sources and identify them, including baby monitors, Bluetooth devices, digital cordless phones (at 2.4 GHz frequency band only), wireless audio transmitters (at both the 2.4 GHz and 5 GHz frequency bands), wireless game controllers, and microwave ovens. Coupled with Huawei eSight, the precise locations of the interference sources can be detected, and the spectrum of them displayed, enabling the administrator to remove the interference in a timely manner.

- **Rogue device monitoring**

Huawei APs support WIDS/WIPS, and can monitor, identify, defend, counter, and perform refined management on the rogue devices, to provide security guarantees for air interface environment and wireless data transmission.

- **AP access authentication and encryption**

The AP access control ensures validity of APs. The CAPWAP link protection and DTLS encryption provide security assurance, improving data transmission security between the AP and the AC.

- **Automatic radio calibration**

Automatic radio calibration allows an AP to collect signal strength and channel parameters of surrounding APs and generate AP topology according to the collected data. Based on interference from authorized APs, rogue APs, and non-Wi-Fi interference sources, each AP automatically adjusts its transmit power and working channel to make the network operate at the optimal performance. In this way, network reliability and user experience are improved.

- **Smart Application Control**

Huawei APs support smart application control technology and can implement visualized control on Layer 4 to Layer 7 applications.

- **Traffic identification**

Coupled with Huawei ACs, the APs can identify over 800 common applications in various office scenarios. Based on the identification results, policy control can be implemented on user services, including priority adjustment, scheduling, blocking, and rate limiting to ensure efficient bandwidth resource use and improve quality of key services.

- **Traffic statistics collection**

Traffic statistics of each application can be collected globally, by SSID, or by user, enabling the network administrator to know application use status on the network. The network administrator or operator can implement visualized control on service applications on smart terminals to enhance security and ensure effective bandwidth control.

Basic Specifications**Hardware specifications**

	Item	Description
Technical specifications	Dimensions (H x W x D)	100 mm x 290 mm x 260 mm
	Weight	AP8030DN: 3.6 kg AP8130DN: 4.0 kg
	Interface type	2 x 10/100/1000M self-adaptive Ethernet interface (RJ45) 1 x Management console port (RJ45) 1 x SFP optical port <i>Note: The optical port supports single-fiber bidirectional optical modules.</i>
	LED indicator	SYS indicator: indicates the power-on, startup, running, alarm, and fault status of the system. Link/ACT indicator: indicates the Ethernet interface connection status and data transmission status. Wireless indicator: indicates the signal strength or service traffic.
Power specifications	Power input	PoE power supply: -48 V DC (in compliance with IEEE 802.3at) NOTE: The APs do not support AC power supply. If AC power supply is required, use a PoE adapter. Ensure that the installation position of the PoE adapter meets requirements.
	Maximum power consumption	AP8030DN: 20.1 W AP8130DN: 22.4 W NOTE: The actual maximum power consumption depends on local laws and regulations.
Environmental specifications	Operating temperature	-40°C to +65°C
	Storage temperature	-40°C to +70°C
	Operating humidity	0% to 100% (non-condensing)
	Dustproof and waterproof grade	IP67
	Wind survivability	Up to 165 mph
	Altitude	-60 m to +5000 m
	Atmospheric pressure	53 kPa to 106 kPa
Radio specifications	Antenna type	AP8030DN: 12 built-in dual-band combined antennas AP8130DN: external antennas
	Antenna gain	AP8030DN: 10 dBi (2.4 GHz); 10 dBi (5 GHz); horizontal beamwidth 60°, vertical beamwidth 30°

Item		Description	
Radio specifications	Maximum number of VAPs for each radio	16	
	Maximum number of users	≤ 256	
	Maximum transmit power	2.4 GHz: 28 dBm (combined power) 5 GHz: 26 dBm (combined power) NOTE: The actual transmit power depends on local laws and regulations. You can adjust the transmit power from the maximum transmit power to 1 dBm, with a step of 1 dB.	
	Power increment	1 dBm	
	Receiver sensitivity	2.4 GHz 802.11b (CCK):	-100 dBm @ 1 Mb/s; -90 dBm @ 11 Mb/s
		2.4 GHz 802.11g (non-HT20):	-95 dBm @ 6 Mb/s; -82 dBm @ 54 Mb/s
		2.4 GHz 802.11n (HT20):	-95 dBm @ MCS0; -74 dBm @ MCS23
		2.4 GHz 802.11n(HT40):	-92 dBm @ MCS0; -71 dBm @ MCS23
		5 GHz 802.11a (non-HT20):	-96 dBm @ 6 Mb/s; -80 dBm @ 54 Mb/s
		5 GHz 802.11n (HT20):	-95 dBm @ MCS0; -74 dBm @ MCS23
5 GHz 802.11n (HT40):		-92 dBm @ MCS0; -71 dBm @ MCS23	
5 GHz 802.11ac (VHT20):		-95 dBm @ MCS0NSS1; -67 dBm @ MCS9NSS3	
5 GHz 802.11ac (VHT40):		-92 dBm @ MCS0NSS1; -63 dBm @ MCS9NSS3	
5 GHz 802.11ac (VHT80):	-90 dBm @ MCS0NSS1; -59 dBm @ MCS9NSS3		

Software specifications

Item	Description
WLAN features	<ul style="list-style-type: none"> • Compliance with IEEE 802.11a/b/g/n/ac • Maximum rate: 1.75 Gbit/s(AP8030DN) • Maximum rate: 2.6 Gbit/s(AP8130DN) • Maximum Ratio Combining (MRC) • Cyclic Delay Diversity (CDD)/Cyclic Shift Diversity (CSD) • Maximum Likelihood Detection (MLD) • Data unit aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Rx only) • 802.11 Dynamic Frequency Selection (DFS) for smart channel selection and switchback • Short Guard Interval (GI) in 20 MHz, 40 MHz, and 80 MHz modes • Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding • Automatic and manual rate adjustment (the rate is adjusted automatically by default) • WLAN channel management and channel rate adjustment • Automatic channel scanning and interference avoidance • Service Set Identifier (SSID) hiding, support for SSIDs in Chinese • Signal Sustain Technology (SST) • Unscheduled Automatic Power Save Delivery (U-APSD) • Control and Provisioning of Wireless Access Points (CAPWAP) in Fit AP mode • Automatic access in Fit AP and Cloud AP modes • Extended Service Set (ESS) in Fit AP mode • WDS in Fit AP mode • Mesh networking in Fit AP mode • Dual-MPP Mesh networking in Fit AP mode • Multi-user CAC • Hotspot2.0 in Fit AP mode • 802.11k and 802.11v smart roaming in Fit AP mode

Item	Description
Network features	<ul style="list-style-type: none">• Compliance with IEEE 802.3ab• Auto-negotiation of the rate and duplex mode; automatic switchover between the Media Dependent Interface (MDI) and Media Dependent Interface Crossover (MDI-X)• SSID-based VLAN assignment• VLAN trunk on uplink Ethernet ports• 4,094 VLAN IDs (1 to 4,094) and a maximum of 16 virtual APs (VAPs) for each radio• AP control channel in tagged and untagged mixed mode• DHCP client, obtaining IP addresses through DHCP• Tunnel forwarding and direct forwarding• STA isolation in the same VLAN• Multicast Domain Name Service (mDNS) gateway protocol: supports AirPlay and AirPrint service sharing between users of different VLANs• Access control lists (ACLs)• Link Layer Discovery Protocol (LLDP)• Service holding upon CAPWAP link disconnection in Fit AP mode• Unified authentication on the AC in Fit AP mode• Unified authentication on the Agile Controller in Cloud AP mode• AC dual-link backup in Fit AP mode• Soft GRE• IPv6 Portal• IPv6 SAVI• IPv6 in Fit AP mode• NAT in Fat AP and Cloud AP modes

Item	Description
QoS features	<ul style="list-style-type: none">• Priority mapping and packet scheduling based on a WMM profile to implement priority-based data processing and forwarding• WMM parameter management for each radio• WMM power saving• Priority mapping for upstream packets and flow-based mapping for downstream packets• Queue mapping and scheduling• User-based bandwidth limiting• Adaptive bandwidth management (the system dynamically adjusts bandwidth based on the number of users and radio environment to improve user experience)• Airtime scheduling• Support for Microsoft Lync APIs and high voice call quality through Lync API identification and scheduling• Smart Application Control (SAC) in Fit AP mode
Security features	<ul style="list-style-type: none">• Open system authentication• WEP authentication/encryption• WPA/WPA2-PSK authentication and encryption• WPA/WPA2-802.1x authentication and encryption• WPA-WPA2 authentication• WAPI authentication and encryption• WIDS including rogue AP and STA detection, attack detection, STA/AP blacklist and whitelist• 802.1x authentication, MAC address authentication, and Portal authentication• 802.11w Protected Management Frames (PMFs)• Application identification• URL filtering


Item	Description
Maintenance features	<ul style="list-style-type: none"> • Unified management and maintenance on the AC in Fit AP mode • Unified management and maintenance on the Agile Controller in Fit AP mode • Plug-and-Play (PnP) in Fit AP and Cloud AP modes: automatically going online and loading configurations • WDS zero-configuration deployment in Fit AP mode • WMN zero-configuration deployment in Fit AP mode • Batch upgrade in Fat AP and Cloud AP modes • Local AP management through the serial port or using Telnet • STelnet using SSH v2 • SFTP using SSH v2 • Web local AP management through HTTP or HTTPS in Fat AP and Cloud AP modes • Real-time configuration monitoring and fast fault location using the NMS • SNMP v1/v2/v3 in Fat AP mode • System status alarm • Network Time Protocol (NTP) in Fat AP and Cloud AP modes • Dying Gasp
BYOD	<p>NOTE</p> <p>The AP supports bring your own device (BYOD) only in Fit AP mode.</p> <ul style="list-style-type: none"> • Identifies the device type according to the Organizationally Unique Identifier (OUI) in the MAC address. • Identifies the device type according to the User Agent (UA) information in an HTTP packet • Identifies the device type according to DHCP options. • The RADIUS server delivers packet forwarding, security, and QoS policies according to the device type carried in the RADIUS authentication and accounting packets.
Location service	<p>NOTE</p> <p>The AP supports the locating service only in Fit AP mode.</p> <ul style="list-style-type: none"> • Locates tags manufactured by AeroScout or Ekahau. • Locates Wi-Fi terminals. • Works with eSight to locate rogue devices.
Spectrum analysis	<p>NOTE</p> <p>The AP supports spectrum analysis only in Fit AP mode.</p> <ul style="list-style-type: none"> • Identifies interference sources such as baby monitors, Bluetooth devices, digital cordless phones (at 2.4 GHz frequency band only), wireless audio transmitters (at both the 2.4 GHz and 5 GHz frequency bands), wireless game controllers, and microwave ovens. • Works with Huawei eSight to locate and perform spectrum analysis on interference sources.

Standards compliance


Item	Description
Safety standards	UL 60950-1 UL 60950-22 CAN/CSA 22.2 No.60950-1 CAN/CSA 22.2 No.60950-22 IEC 60950-1 IEC 60950-22 EN 60950-1 EN 60950-22 GB 4943
Radio standards	ETSI EN 300 328 ETSI EN 301 893 FCC Part 15C: 15.247 FCC Part 15C: 15.407 RSS-210 AS/NZS 4268 FCC Part 15.107 and 15.109
EMC standards	EN 301 489-1 EN 301 489-17 ETSI EN 60601-1-2 FCC Part 15 ICES-003 YD/T 1312.2-2004 ITU k.21 GB 9254 GB 17625.1 AS/NZS CIPSR22 EN 55022 EN 55024 CISPR 22 CISPR 24 IEC61000-4-6 IEC61000-4-2
IEEE standards	IEEE 802.11a/b/g IEEE 802.11n IEEE 802.11ac IEEE 802.11h IEEE 802.11d IEEE 802.11e IEEE 802.11k IEEE 802.11u IEEE 802.11v IEEE 802.11w
Security standards	802.11i, Wi-Fi Protected Access 2 (WPA2), WPA 802.1x Advanced Encryption Standards (AES), Temporal Key Integrity Protocol (TKIP), and Extensible Authentication Protocol (EAP) types: <ul style="list-style-type: none"> EAP-Transport Layer Security (TLS) EAP-Tunneled TLS (TTLS) or Microsoft Challenge Handshake Authentication Protocol Version 2 (MSCHAPv2) Protected EAP (PEAP) v0 or EAP-MSCHAPv2 EAP-Flexible Authentication via Secure Tunneling (FAST) PEAP v1 or EAP-Generic Token Card (GTC) EAP-Subscriber Identity Module (SIM)
Environmental standards	ETSI 300 019-2-1 ETSI 300 019-2-2 ETSI 300 019-2-4 IEC 60068-2-52 ETSI 300 019-1-1 ETSI 300 019-1-2 ETSI 300 019-1-4
EMF	CENELEC EN 62311 CENELEC EN 50385 OET65 RSS-102 FCC Part1&2 FCC KDB series

Item	Description
RoHS	Directive 2002/95/EC & 2011/65/EU
Reach	Regulation 1907/2006/EC
WEEE	Directive 2002/96/EC & 2012/19/EU
Certifications	Wi-Fi Alliance (WFA) certified 802.11a/b/g/n/ac


AP8030DN Antennas Pattern

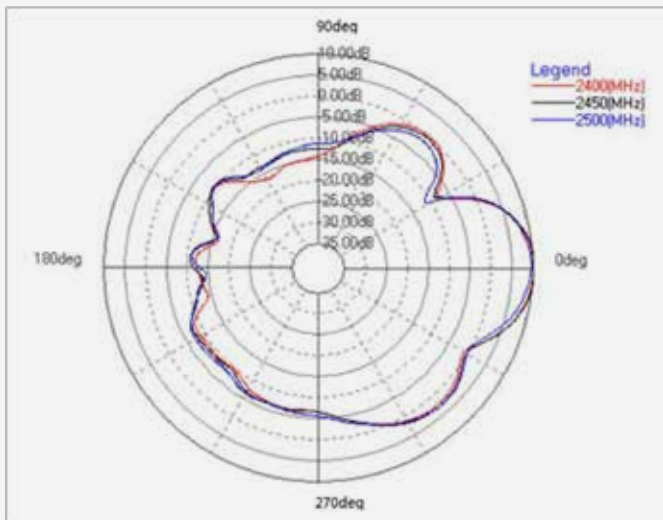


2.4G (PHI=0)

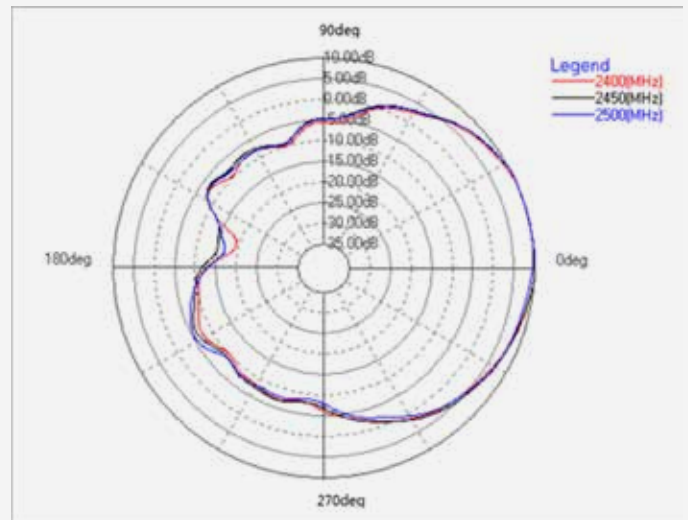

2.4G (PHI=90)

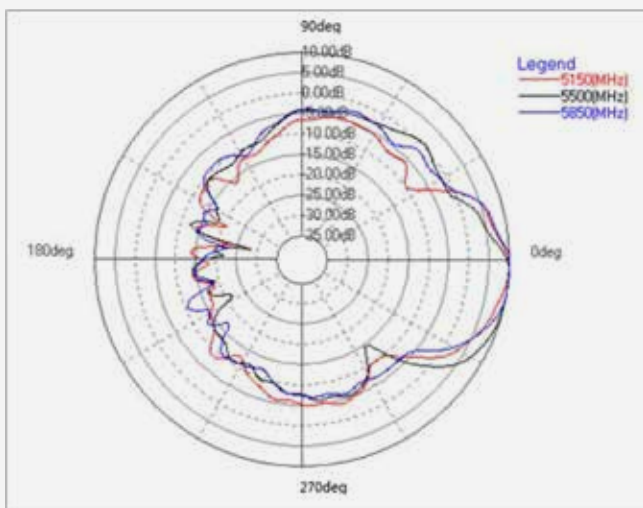

5G (PHI=0)

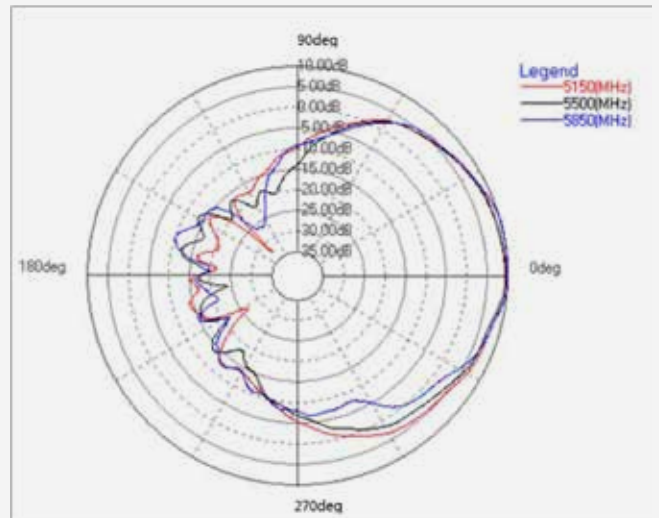

5G (PHI=90)

Ordering Information

Component	Part Description	Configuration Description	Remarks
AP			
AP8030DN	Assembling Components,AP8030DN,AP8030DN,AP8030DN Mainframe(11ac,General AP Outdoor,3x3 Double Frequency,Built-in Antenna)	The mounting bracket is included in the standard configuration. The AP supports PoE power supply.	The standard configuration does not include the network cable.
AP8130DN	Assembling Components,AP8130DN,AP8130DN,AP8130DN Mainframe(11ac,General AP Outdoor,3x3 Double Frequency,External Antenna)	The mounting bracket is included in the standard configuration. The AP supports PoE power supply.	The standard configuration does not include the network cable.

Professional Service and Support

Huawei WLAN planning tools deliver expert network design and optimization services using the most professional simulation platform in the industry. Backed by fifteen years of continuous investment in wireless technologies, extensive network planning and optimization experience, and rich expert resources, Huawei helps customers:

- Design, deploy, and operate a high-performance network that is reliable and secure.
- Maximize return on investment and reduce operating expenses.

More Information

For more information, please visit <http://e.huawei.com/en/> or contact your local Huawei office.



Enterprise Services



Product Overview





Marketing Documentation

Copyright © Huawei Technologies Co., Ltd. 2017. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice

 HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.
Huawei Industrial Base
Bantian Longgang
Shenzhen 518129,P.R.China
Tel: +86 755 28780808

www.huawei.com